

DESCRIPTION

CATALOG: E-720-U-240-SC-S	BALLAST TYPE: Electronic	STARTING METHOD: Programmed Rapid Start	NUMBER OF LAMPS - LAMP TYPE: 1 or 2 F40T12, F34T12
-------------------------------------	------------------------------------	---	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 – 277 V~ +/- 10%	LAMP WATTS: 34/40 W	INPUT WATTS: 36 - 72 W	INPUT CURRENT: 0,59– 0,25 A	OCV: 425 V~ Min	PF: > 0,98	FREQUENCY: 50 / 60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 86%	BEF: 1,3	LAMP CONNECTION: Serie	THD (1): < 15 %	NO PCB'S

(1) FOR 2-F24T5

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.22	8.90	8.35	1.70	9.50	1.18
	TOL(+/-)	0.01	0.01	0.01	0.05	0.05	0.05
	MM	31	226	212	43	241	30
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	10	10	24	32	24		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	254	254	609	812	609		
TOL(+/-)	10	10	10	10	10		


CARTON CHARACTERISTICS

UNITS/CARTON 20	CARTONS/LAYER 12	# OF LAYERS 9	UNITS/PALLET 2160	PIECE WEIGHT 1 lb.	CARTON WEIGHT 21 lb.	PALLET WEIGHT 2317 lb.
CARTONS/PALLET 108	CARTON DIMENSIONS 12,75" x 12,0" x 4,50"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET 40" x 48" x 48"	

MISC.

CARTON LABEL

ELECTRICAL DIAGRAM

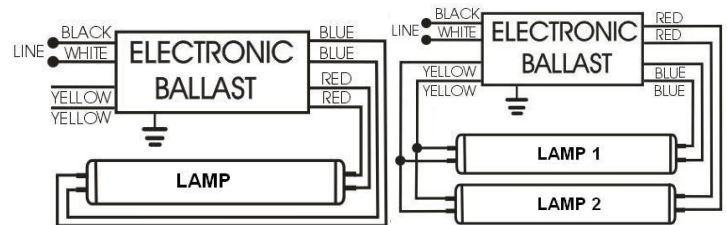

PRODUCT LABEL



Lighting and Power Source
2840 Keller Springs Road,
Suite 1102 & 1103
Carrollton, TX 75006 – 4832
Tel : (888) 385-4448
Fax : (972) 418-5858

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.