

DESCRIPTION


CATALOG: E-725-U-239-R1-S	BALLAST TYPE: Electronic	STARTING METHOD: Programmed Rapid Start	NUMBER OF LAMPS - LAMP TYPE: 1 ó 2 F39T5, 1 ó 2 FC12T5
-------------------------------------	------------------------------------	---	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 – 277 V~ +/- 10%	LAMP WATTS: 39, 40 W	INPUT WATTS: 40 to 82 W	INPUT CURRENT: 0,716 – 0,307 A	OCV: 900 V~ Min	PF: > 0,98	FREQUENCY: 50 / 60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 90%	BEF: 1,09	LAMP CONNECTION: Serie	THD (1): < 15 %	NO PCB'S

(1) FOR 2-F24T5

PHYSICAL CHARACTERISTICS

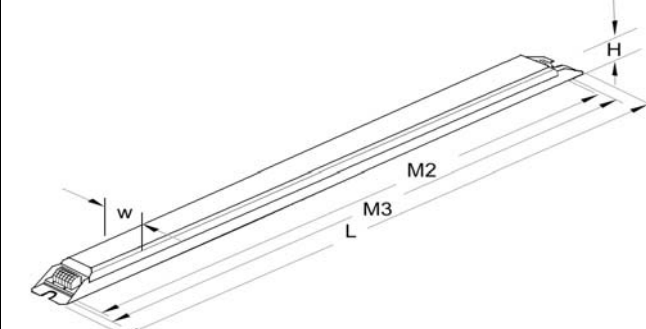	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES TOL(+/-)	N/A	16,0625 0,0125	16,375 0,0125	1,1875 0,0125	16,5 0,0125	1,125 0,0125
	MM TOL(+/-)	N/A	407,9 0,31	415,9 0,31	30,2 0,31	419,1 0,31	28,6 0,31
	LEAD LENGTH						
	UNITS	BLACK	WHITE	RED	BLUE	BLUE	
INCHES TOL(+/-)	N/A	N/A	N/A	N/A	N/A		
MM TOL(+/-)	N/A	N/A	N/A	N/A	N/A		

CARTON CHARACTERISTICS


UNITS/CARTON 10	CARTONS/LAYER 14	# OF LAYERS 10	UNITS/PALLET 1400	PIECE WEIGHT 0,57 Kg.	CARTON WEIGHT 5,9 Kg.	PALLET WEIGHT 848 Kg.
CARTONS/PALLET 140	CARTON DIMENSIONS 44,5 x 17,3 x 7,5 cm.		PALLET DIMENSIONS 8,8 x 121,1 x 75,1 cm.		PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET 101,6 x 121,9 x 76,2 cm.	

MISC.

CARTON LABEL



ELECTRICAL DIAGRAM

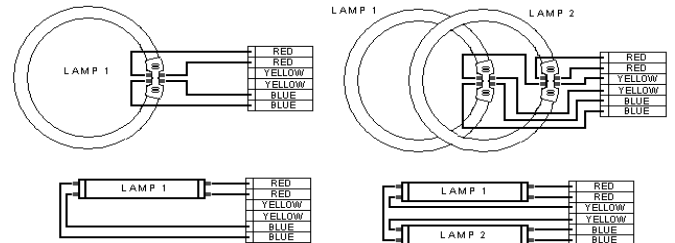

PRODUCT LABEL




ISO 9001:2000



Lighting and Power Source
2840 Keller Springs Road,
Suite 1102 & 1103
Carrollton, TX 75006 – 4832
Tel : (888) 385-4448
Fax : (972) 418-5858

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.