

DESCRIPTION

CATALOG: E-758-T-232-SC	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS – LAMP TYPE: 1-F32T8, 1-F32T8/U, 2-F17T8, 2-F25T8, 2-F32T8, 2-F32T8/U
-----------------------------------	------------------------------------	------------------------------------------	-------------------------------------------------------------------------------------------------

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 277 V~ ±10%	LAMP WATTS: 17/25/32 w	INPUT WATTS: 58 w	INPUT CURRENT: 0.21 A	OCV: 590 v	PF: > 0.97	FREQUENCY: 60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.87	BEF: 1.5	LAMP CONNECTION: PARALLEL	THD (1): < 20%	NO PCB'S

(1) FOR 2-F32T8

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.22	8.90	8.35	1.70	9.50	1.18
	TOL(+/-)	0.01	0.01	0.01	0.05	0.05	0.05
	MM	31	226	212	43	241	30
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
	LEAD LENGTH						
UNITS	BLACK	WHITE	RED	BLUE	BLUE		
INCHES	22	22	36	26	26		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	559	559	914	660	660		
TOL(+/-)	10	10	10	10	10		

CARTON CHARACTERISTICS


UNITS/CARTON 20	CARTONS/LAYER 12	# OF LAYERS 6	UNITS/PALLET 1440	PIECE WEIGHT 1.6 lbs	CARTON WEIGHT 33 lbs	PALLET WEIGHT 2,453 lbs
CARTONS/PALLET 72	CARTON DIMENSIONS 12.75" x 12.00" x 4.50"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 36"	

MISC.

CARTON LABEL



ELECTRICAL DIAGRAM

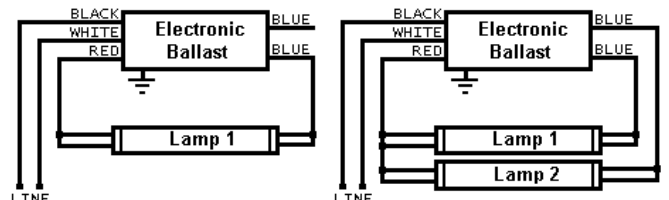

INSULATE UNUSED LEAD FOR 1000 V

PRODUCT LABEL

277 V~ 0.21 A 590 OCV 60 Hz FOR 1-F32T8 OR 1-F32T8/U FOR 2-F32T8 OR 2-F32T8/U FOR 2-F25T8 OR 2-F17T8 SOUND RATED A 5 YEAR WARRANTY	INSTANT START ELECTRONIC BALLAST E-758-T-232-SC HIGH POWER FACTOR MINIMUM 0°C MADE IN MEXICO		GROUND BALLAST CASE MOUNT LAMPS WITHIN 3/4" OF GROUNDED METAL REFLECTOR. INSTALL IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES INSULATE UNUSED LEAD FOR 1000 V	CAUTION: HAZARDOUS VOLTAGE DISCONNECT LINE VOLTAGE BEFORE INSTALLING OR REPLACING	CLASS P INHERENT THERMAL PROTECTION TYPE 1 OUTDOOR
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------	--	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------



ISO 9001:2000



Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.

ISB LPS, LP
 2840 Keller Springs Road,
 Suites 1102 & 1103
 Carrollton, Tx. 75006-4832
 Tel. (972) 416-4500
 Fax. (972) 418-5858