

DESCRIPTION

CATALOG: E-758-U-432-SC	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS – LAMP TYPE: 1 or 2 or 3 or 4 - F17T8, F25T8, F32T8, F32T8/U
-----------------------------------	------------------------------------	--	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120/277 V~ ±10%	LAMP WATTS: 17/25/32 w	INPUT WATTS: 113 w	INPUT CURRENT: 0.950/0.420 A	OCV: 650 v	PF: > 0.97	FREQUENCY: 50/60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.87	BEF: 0.769	LAMP CONNECTION: PARALLEL	THD (1): < 10%	NO PCB'S

(1) FOR 4-F32T8

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS							
	UNITS	M1	M2	M3	W	L	H	
	INCHES	1.22	8.90	8.35	1.70	9.50	1.18	
	TOL(+/-)	0.01	0.01	0.01	0.05	0.05	0.05	
	MM	31	226	212	43	241	30	
TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30		
LEAD LENGTH								
UNITS	BLACK	WHITE	YELLOW	YELLOW	BLUE	BLUE	RED	RED
INCHES	22	22	43	43	34	34	34	34
TOL(+/-)	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
MM	559	559	1092	1092	863	863	863	863
TOL(+/-)	10	10	10	10	10	10	10	10

CARTON CHARACTERISTICS


UNITS/CARTON 20	CARTONS/LAYER 12	# OF LAYERS 7	UNITS/PALLET 1680	PIECE WEIGHT 1.45 lbs	CARTON WEIGHT 30 lbs	PALLET WEIGHT 2,597 lbs
CARTONS/PALLET 84	CARTON DIMENSIONS 12.75" x 12.00" x 4.50"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 39"	

MISC.

--

CARTON LABEL

ELECTRICAL DIAGRAM

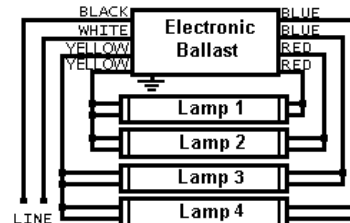

PRODUCT LABEL



ISO 9001:2000



ISB LPS, LP
2840 Keller Springs Road,
Suites 1102 & 1103
Carrollton, Tx. 75006-4832
Tel. (972) 416-4500
Fax. (972) 418-5858

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.