

DESCRIPTION

CATALOG: E629C-F-3240-TP	STARTING METHOD: Rapid Start	INPUT VOLTAGE: 120 V~	OCV: 315 V~	FREQUENCY: 60 Hz
BALLAST TYPE: Magnetic Ballast	CLASS: P	TYPE: 1 outdoor	LAMP CONNECTION: Series	SOUND RATED: A
NO PCB'S				

ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
FC12T9 with FC16T9	2	32 w/ 40	50/10	63	0.56	0.69	1.150	0.93	19	1.7

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.687	6.00	5.440	2.375	6.560	1.5
	TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.050
MM	43	152	138	60	166	38	
TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30	
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	10	10	10	10	10		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	254	254	254	254	254		
TOL(+/-)	10	10	10	10	10		

CARTON CHARACTERISTICS

UNITS/CARTON 24	CARTON/LAYER 9	# OF LAYERS 4	UNITS PALLET 864	PIECE WEIGHT 2.8 lbs	CARTON WEIGHT 67.5 lbs	PALLET WEIGHT 2 465 lbs
CARTON PALLET 36	CARTON DIMENSIONS 14" x 10 5/8" x 6 1/8"		PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 31 1/2"		

MISC.

--


CARTON LABEL



PRODUCT LABEL



ELECTRICAL DIAGRAM

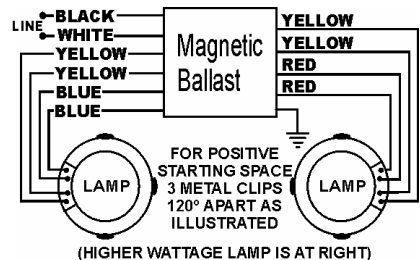

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.



Certificate No. 006281

Lighting and Power Source
 2840 Keller Springs Road,
 Suite 1102 & 1103
 Carrollton, TX 75006 – 4832
 Tel: (888) 385-4448
 Fax: (972) 418-5858