


### DESCRIPTION

CATALOG: <b>ERSFC-132-TPK</b>		STARTING METHOD: Rapid Start	INPUT VOLTAGE: 120 V~	OCV: 245 V~	FREQUENCY: 60 Hz
BALLAST TYPE: Normal Power Factor	CLASS: P	TYPE: 1 outdoor	LAMP CONNECTION: Series	SOUND RATED: A NO PCB'S	

### ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
FC12T9	1	32	50/10	31	0.61	0.62	2.000	0.42	9	1.5
FC16T9	1	40	50/10	32	0.52	0.64	2.000	0.51	12	1.5

### PHYSICAL CHARACTERISTICS

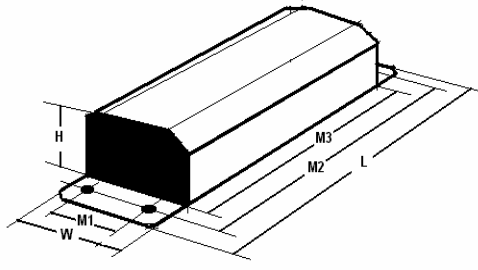

CASE DIMENSIONS						
UNITS	M1	M2	M3	W	L	H
INCHES	N/A	6.0	5.275	1.937	6.5	1.375
TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.150
MM	N/A	153	134	49	165	35
TOL(+/-)	0.25	0.25	0.25	1.30	1.30	3.80

LEAD LENGTH						
UNITS	BLACK	WHITE	RED	BLUE	YELLOW	
INCHES	12	30	36	30		
TOL(+/-)	3/8	3/8	3/8	3/8		
MM	304	762	914	762		
TOL(+/-)	10	10	10	10		

### CARTON CHARACTERISTICS

UNITS/CARTON: 16	CARTON/LAYER: 12	# OF LAYERS: 5	UNITS PALLET: 960	PIECE WEIGHT: 2.3 lbs	CARTON WEIGHT: 38 lbs	PALLET WEIGHT: 2 315 lbs
CARTON PALLET: 60	CARTON DIMENSIONS: 12" x 12" x 4"	PALLET DIMENSIONS: 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET: 40" x 48" x 28"			


### MISC.

With Wire Harness and Circline Socket.

#### CARTON LABEL



#### ELECTRICAL DIAGRAM



#### PRODUCT LABEL



Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.



**Lighting and Power Source**  
 2840 Keller Springs Road,  
 Suite 1102 & 1103  
 Carrollton, TX 75006 – 4832  
 Tel: (888) 385-4448  
 Fax: (972) 418-5858