

DESCRIPTION

CATALOG: FCF-13-TP/C		STARTING METHOD: Preheat Start	INPUT VOLTAGE: 120 V~	OCV: --- V~	FREQUENCY: 60 Hz
BALLAST TYPE: Normal Power Factor	CLASS: P	TYPE: 1 outdoor	LAMP CONNECTION: Series	SOUND RATED: A	NO PCB'S

ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
CFT13W/GX23	1	13	32/0	17	0.28	0.97	5.803	0.48	9	1.6
CFQ13W/GX23	1	13	32/0	18	0.29	1.05	5.915	0.52	10	1.6

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M	W	L	H
	INCHES	N / A	N / A	2.75	1.45	3.10	1.70
	TOL(+/-)			0.010	0.050	0.050	0.150
	MM	N / A	N / A	70	37	79	43
	TOL(+/-)			0.25	1.30	1.30	3.80
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	10						
TOL(+/-)	3/8						
MM	254						
TOL(+/-)	10						

CARTON CHARACTERISTICS



UNITS/CARTON	CARTON/LAYER	# OF LAYERS	UNITS PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
40	20	5	4000	0.45 lbs	18 lbs	1 800 lbs
CARTON PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET			
100	9" x 10" x 4"	40" x 48" x 7"	40" x 48" x 28"			

MISC.

CARTON LABEL	ELECTRICAL DIAGRAM
--------------	--------------------



PRODUCT LABEL

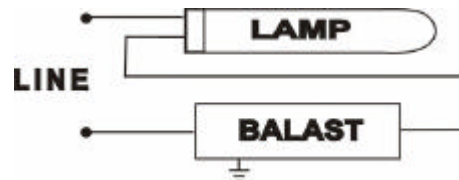

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.



Certificate No. 006281

Lighting and Power Source
 2840 Keller Springs Road,
 Suite 1102 & 1103
 Carrollton, TX 75006 – 4832
 Tel: (888) 385-4448
 Fax: (972) 418-5858