

DESCRIPTION

CATALOG: FCF-7/9-TP	STARTING METHOD: Preheat Start	INPUT VOLTAGE: 120 V~	OCV: --- V~	FREQUENCY: 60 Hz
BALLAST TYPE: Normal Power Factor	CLASS: P	TYPE: 1 outdoor	LAMP CONNECTION: Series	SOUND RATED: A
NO PCB'S				

ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
CF7WT4	1	7	0/-18	10	0.18	1.07	10.49	0.48	8	1.6
CF9WT4	1	9	25/-4	10	0.16	0.86	8.641	0.52	12	1.6

PHYSICAL CHARACTERISTICS


	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	N / A	1.704	2.047	1.36	2.375	1.25
	TOL(+/-)		0.010	0.010	0.050	0.050	0.150
	MM	N / A	43	52	35	60	32
	TOL(+/-)		0.25	0.25	1.30	1.30	3.80
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	10						
TOL(+/-)	3/8						
MM	254						
TOL(+/-)	10						

CARTON CHARACTERISTICS


UNITS/CARTON 24	CARTON/LAYER 48 & 35	# OF LAYERS 4 & 1	UNITS PALLET 5448	PIECE WEIGHT 0.43 lbs	CARTON WEIGHT 10.8 lbs	PALLET WEIGHT 2 500 lbs
CARTON PALLET 227	CARTON DIMENSIONS 6 1/8" x 8 1/4" x 4 1/4"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET 40" x 48" x 29"	

MISC.

CARTON LABEL	ELECTRICAL DIAGRAM
--------------	--------------------

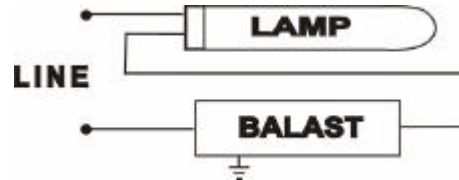

PRODUCT LABEL

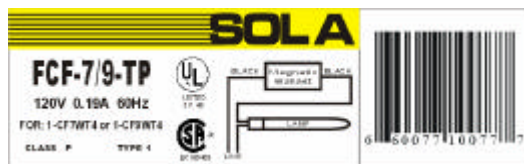

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.



Certificate No. 006281

Lighting and Power Source
2840 Keller Springs Road,
Suite 1102 & 1103
Carrollton, TX 75006 – 4832
Tel: (888) 385-4448
Fax: (972) 418-5858